


Waveguide size	Dimensions							μ inches/ μ m	4 places
WR	A	B	C	K	FF	GG	JJ	Ra	delta
			min	min	max				
187	1.872 $\pm$.0030 47.55 $\pm$.0800	0.872 $\pm$.0030 22.149 $\pm$.0800	2.5 63.5	3.50 88.9	0.030 0.800	0.002 0.050	0.008 0.200	4.0 1.0	R0.25 R6.35
159	1.590 $\pm$.0020 40.39 $\pm$.0500	0.795 $\pm$.0020 20.193 $\pm$.0500	2.44 61.9	3.19 81.0	0.030 0.800	0.002 0.050	0.008 0.200	4.0 1.0	R0.25 R6.35
137	1.372 $\pm$.0020 34.85 $\pm$.0500	0.622 $\pm$.0020 15.799 $\pm$.0500	1.94 49.2	2.69 68.3	0.030 0.800	0.002 0.050	0.008 0.200	4.0 1.0	R0.15 R3.8
112	1.122 $\pm$.0015 28.499 $\pm$.0400	0.497 $\pm$.0015 12.62 $\pm$.0400	1.88 47.8	1.88 47.8	0.030 0.800	0.002 0.050	0.004 0.100	4.0 1.0	0.20X45 5X45
90	0.900 $\pm$.0010 22.86 $\pm$.0300	0.400 $\pm$.0010 10.16 $\pm$.0300	1.63 41.4	1.63 41.4	0.030 0.800	0.002 0.050	0.004 0.100	4.0 1.0	0.137X45 3.5X45
75	0.750 $\pm$.0010 19.05 $\pm$.0300	0.375 $\pm$.0010 9.525 $\pm$.0300	1.5 38.1	1.5 38.1	0.030 0.800	0.002 0.050	0.004 0.100	4.0 1.0	0.13X45 3.5X45
62	0.622 $\pm$.0008 15.799 $\pm$.0200	0.311 $\pm$.0008 7.899 $\pm$.0200	1.31 33.3	1.31 33.3	0.016 0.400	0.002 0.050	0.004 0.100	4.0 1.0	0.13X45 3.5X45
51	0.510 $\pm$.0008 12.954 $\pm$.0200	0.255 $\pm$.0008 6.477 $\pm$.0200	1.31 33.3	1.31 33.3	0.016 0.400	0.002 0.050	0.004 0.100	4.0 1.0	R0.56 R14.25
42	0.420 $\pm$.0008 10.668 $\pm$.0200	0.170 $\pm$.0008 4.318 $\pm$.0200	0.875 22.2	0.875 22.2	0.016 0.400	0.002 0.050	0.004 0.100	4.0 1.0	R0.56 R14.25
34	.0340 $\pm$.0008 8.636 $\pm$.0200	0.170 $\pm$.0008 4.318 $\pm$.0200	0.875 22.2	0.875 22.2	0.016 0.400	0.002 0.050	0.002 0.050	4.0 1.0	R0.46 R11.70
28	0.280 $\pm$.0008 7.112 $\pm$.0200	0.140 $\pm$.0008 3.556 $\pm$.0200	0.750 19.1	0.750 19.1	0.016 0.400	0.002 0.050	0.002 0.050	4.0 1.0	
22	0.224 $\pm$.0008 5.690 $\pm$.0200	0.112 $\pm$.0008 2.845 $\pm$.0200	1.125 28.6		0.008 0.200	0.001 0.030	0.002 0.050	4.0 1.0	
19	0.188 $\pm$.0008 4.775 $\pm$.0200	0.094 $\pm$.0008 2.388 $\pm$.0200	1.125 28.6		0.008 0.200	0.001 0.030	0.002 0.050	4.0 1.0	
10	0.10 $\pm$.0016 2.54 $\pm$.0400	0.05 $\pm$.0016 1.27 $\pm$.0400	0.75 19.1		0.008 0.200	0.001 0.030	0.002 0.050	4.0 1.0	



Длина: 3050 mm
(также под заказ)
Сплав: 6063 (также
под заказ)
Прямизна и
искривление:
DIN 17615
есть в наличии

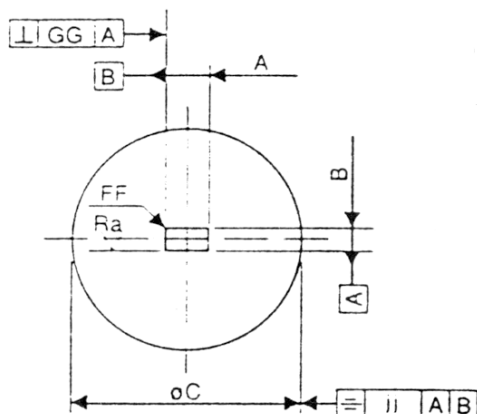