


| Wave<br>guide<br>Size | Dimensions                   |                              |                              |                              |                              | max          | ±<br>10%     |                              |              |              |              |                                  |
|-----------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|--------------|--------------|------------------------------|--------------|--------------|--------------|----------------------------------|
|                       | A                            | B                            | C                            | D                            | E                            | F            | G            | H                            | J            | K            | L            | surface<br>finish<br>μ inch/ μ m |
|                       | inch / mm                    | inch / mm                    | inch / mm                    | inch / mm                    | inch / mm                    |              |              |                              |              |              |              |                                  |
| WRD<br>200            | 2.59 ± .004<br>65.79 ± .100  | 1.205 ± .004<br>30.61 ± .100 | 2.750 ± .004<br>69.85 ± .100 | 1.365 ± .004<br>34.67 ± .100 | .512 ± .002<br>13.00 ± .050  | 0.50<br>1.27 | .102<br>2.59 | .648 ± .002<br>16.46 ± .050  | .004<br>.100 | .002<br>.050 | .002<br>.050 | 25<br>1,0                        |
| WRD<br>350            | 1.480 ± .003<br>37.59 ± .080 | .688 ± .003<br>17.48 ± .080  | 1.608 ± .004<br>40.84 ± .100 | .816 ± .004<br>20.73 ± .100  | .2920 ± .002<br>7.417 ± .050 | 0.30<br>.760 | .058<br>1.47 | .3700 ± .002<br>9.398 ± .050 | .003<br>.080 | .002<br>.050 | .002<br>.050 | 25<br>1,0                        |
| WRD<br>475            | 1.090 ± .003<br>27.69 ± .080 | .506 ± .003<br>12.85 ± .080  | 1.190 ± .003<br>30.23 ± 0.80 | .606 ± .003<br>15.39± .080   | .215 ± .002<br>5.46 ± .050   | 0.30<br>.760 | .043<br>1.09 | .272 ± .002<br>6.91 ± .050   | .003<br>.080 | .002<br>.050 | .002<br>.050 | 25<br>1,0                        |
| DR 19                 | 1.025 ± .003<br>26.04 ± .080 | .475 ± .003<br>12.06 ± .080  | 1.125 ± .005<br>28.58 ± .130 | .575 ± .005<br>14.60 ± .130  | .191 ± .003<br>4.85 ± .080   | 0.30<br>.760 | 0.62<br>1.57 | .256 ± .003<br>6.50 ± .080   | .003<br>.080 | .002<br>.050 | .003<br>.080 | 25<br>1,0                        |
| WRD<br>500            | .752 ± .003<br>19.10 ± .080  | .323 ± .003<br>8.20 ± .080   | .852 ± .004<br>21.64 ± .100  | .423 ± .004<br>10.74 ± .100  | .063 ± .002<br>1.60 ± .050   | 0.20<br>.510 | 0.13<br>.330 | .188 ± .002<br>4.78 ± .050   | .003<br>.080 | .002<br>.050 | .002<br>.050 | 25<br>1,0                        |
| WRD<br>580            | .780 ± .003<br>19.81 ± .080  | .370 ± .003<br>9.398 ± .080  | .880 ± .005<br>22.352 ± .100 | .467 ± .005<br>11.86 ± .100  | .120 ± .001<br>3.048 ± .025  | 0.20<br>.510 | .043<br>1.09 | .200 ± .001<br>5.08 ± .025   | .003<br>.080 | .002<br>.050 | .002<br>.050 | 25<br>1,0                        |
| WRD<br>650            | .720 ± .003<br>18.29 ± .064  | .321 ± .003<br>8.13 ± .064   | .820 ± .003<br>20.83 ± 0.80  | .421 ± .003<br>10.67 ± .080  | .101 ± .001<br>2.57 ± .025   | 0.20<br>.510 | .022<br>.510 | .173 ± .002<br>4.39 ± .025   | .003<br>.080 | .002<br>.050 | .002<br>.050 | 25<br>1,0                        |
| WRD<br>750            | .691 ± .003<br>17.55 ± .080  | .321 ± .003<br>8.15 ± .080   | .791 ± .003<br>20.09 ± .080  | .421 ± .003<br>10.69 ± .080  | .136 ± .002<br>3.45 ± .050   | 0.20<br>.510 | .027<br>.690 | .173 ± .002<br>4.39 ± .050   | .003<br>.080 | .002<br>.050 | .002<br>.050 | 25<br>1,0                        |
| WRD<br>110            | .471 ± .003<br>11.96 ± .080  | 2.19 ± .003<br>5.56 ± .080   | .551 ± .003<br>14.00 ± .080  | .299 ± .003<br>7.59 ± .080   | .0930 ± .002<br>2.362 ± .050 | 0.15<br>.380 | .019<br>.480 | .118 ± .002<br>2.997 ± .050  | .003<br>.080 | .002<br>.050 | .002<br>.050 | 25<br>1,0                        |
| WRD<br>180            | 2.88 ± .003<br>7.32 ± .080   | 1.34 ± .003<br>3.40 ± .080   | .368 ± .003<br>9.35 ± .080   | .214 ± .003<br>5.44 ± .080   | .0570 ± .002<br>1.448 ± .050 | 0.15<br>.380 | .011<br>.280 | .0720 ± .002<br>1.829 ± .050 | .003<br>.080 | .002<br>.050 | .002<br>.050 | 25<br>1,0                        |

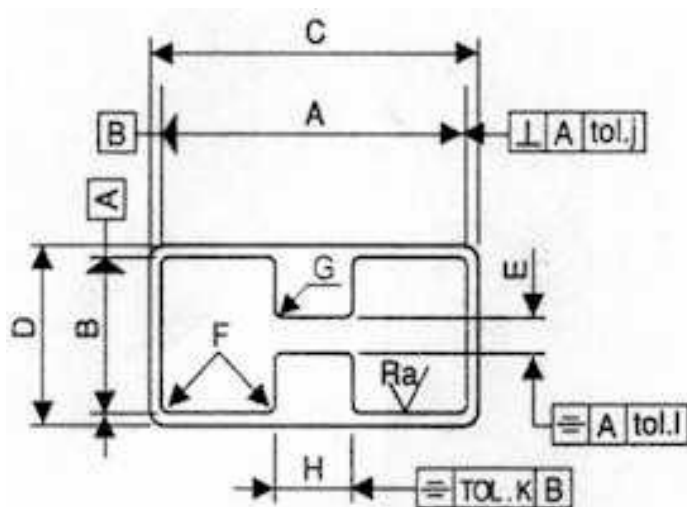

Длина: 3050 mm (также под заказ)  
Сплав: 6063 (также под заказ)  
Прямизна и искривление:  
DIN 17615  
есть в наличии